


778 Rocker Switch



778-3VAT-20G



778-1VAT-00G

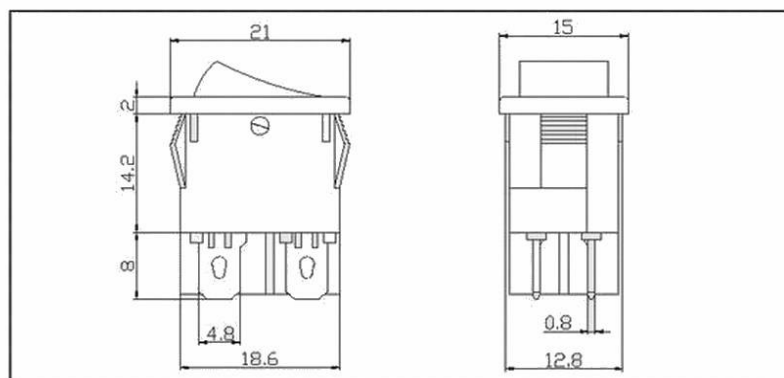

Single pole


APPLIANCE CUT-OUT		
X	Y	Z
0.75~1.25	19.1 ⁺⁰ _{-0.1}	12.9 ^{+0.1} ₋₀
1.25~2	19.3 ⁺⁰ _{-0.1}	12.9 ^{+0.1} ₋₀
2~3	19.7 ⁺⁰ _{-0.1}	12.9 ^{+0.1} ₋₀

Widely used in Juicer, Coffee Maker, Stirrer, etc appliances

Technical parameters

Electrical parameters	10A125VAC 6A250VAC 6(2)A250VAC T85/55 1E4
Electrical life	10000 cycles
Mechanical life	50000 cycles
Contact resistance	≤20mΩ
Insulation resistance	> 100mΩ
Voltage withstand	1500Vac
Ambient temperature	0-105℃
Flammability	UL94V-0
Fire resistance	850℃
Housing and Cap material	PA66
Contact material	Silver Alloy
Terminal material	Copper Alloy
Approval Certification	SEMKO

How to order

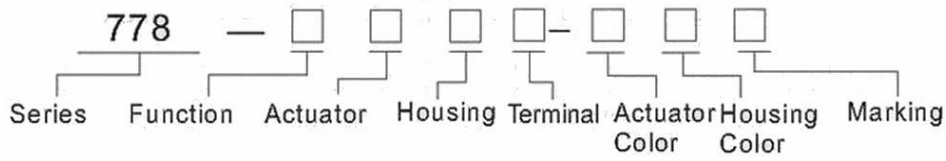

Function(1)		
Function	Circuitry	Code
ON-OFF	4 Pins	1
ON-OFF with Lamp	4 Pins	3
ON-OFF	2 Pins	14
ON-OFF with Lamp	3 Pins	17

Actuator(2)		
Actuator Shape	Versions	Code
Arc actuator		V

Housing(3)	
Versions	Code
	A

Terminal(4)		
Terminal	Versions	Code
Quick-connect terminal 4.8X0.8mm		T

Actuator Marking(5)			
Versions	Code	Versions	Code
○ 	G	ON OFF	R
○ —	P		

Examples of Common Part Numbers and Descriptions

Part Number	Circuitry	Switch Function	Terminal Type	Actuator/Housing Color	Marking
778-1VAT-00G		ON-OFF	Quick-connect terminal 4.8X0.8mm	Black/Black	○ —
778-3VAT-20P		ON-OFF with Lamp	Quick-connect terminal 4.8X0.8mm	Red/Black	○